

# TROFFER

2'x2' / 2'x4'

**5**  
YEAR  
WARRANTY



2' x 2'  
configuration

50,000  
Rated  
Life Hours

Dimmable  
0-10V

## Key Features

### Light weight fixture for easy installation

- Available in 2'x2' and 2'x4' configurations
- Uniform and consistent color
- Excellent thermal design
- Long Life LED chips
- Lightweight fixture for easy installation
- 0-10V dimming
- Power Factor >0.9
- Dimming range of 5%-100%
- 120-277V
- 50,000 Hours rated average life



## Applications

- Office & Facility Lighting
- Education Facility Lighting
- Healthcare Facility Lighting
- Retail Store Lighting
- Laboratory & Lobby Lighting



## More Savings

naturaLED Troffer is available in 2'x2' and 2'x4' configurations, with a lightweight design making it easy for installation and easy access from the ceiling. Our troffers are suitable for multiple applications from office environments, education facilities, hospitals, supermarkets, etc. The LED troffers are 40-60% more efficient than traditional fluorescent troffers.

naturaLED		Fluorescent		SAVINGS
WATTAGE	Energy Usage	WATTAGE	Energy Usage	
38W	2'x2' 	60-70W		<b>Up to 84% Savings!</b>
50W	2'x4'	90-100W		
76W	2'x4'	120-130W		

Available  
in 2'x2'  
and 2'x4'

120-277V

Easy Installation


5-100% Dimming Range

Lightweight

### Dimension

	Width	Height	Depth	Weight (lbs)
2' x 2'	23.75/603	23.75/603	4.5/114	7.95
2' x 4'	48 / 1212	23.75/603	4.5/114	9.95

\*Inch/mm

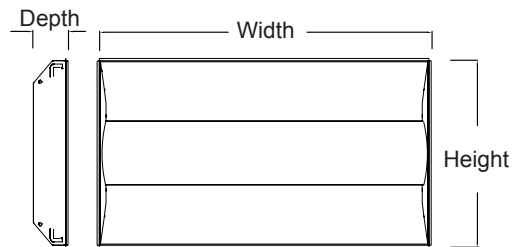

### Specifications

Item Code	Description	Color Temp	Wattage	Output Lumen	Equiv. Wattage	Size	Dimmable	CRI	DLC	ETL Intertek
61959	LED 38W TROFFER 2'x2' 3500K	3500K	38W	3,500	70W FL	2' x 2'	0-10V	>80	●	●
61960	LED 38W TROFFER 2'x2' 4000K	4000K	38W	3,500	70W FL	2' x 2'	0-10V	>80	●	●
61961	LED 38W TROFFER 2'x2' 5000K	5000K	38W	3,500	70W FL	2' x 2'	0-10V	>80	●	●
61965	LED 50W TROFFER 2'x4' 3500K	3500K	50W	4,900	100W FL	2' x 4'	0-10V	>80	●	●
61966	LED 50W TROFFER 2'x4' 4000K	4000K	50W	4,900	100W FL	2' x 4'	0-10V	>80	●	●
61973	LED 50W TROFFER 2'x4' 5000K	5000K	50W	4,900	100W FL	2' x 4'	0-10V	>80	●	●
61962	LED 76W TROFFER 2'x4' 3500K	3500K	76W	6,900	130W FL	2' x 4'	0-10V	>80	●	●
61963	LED 76W TROFFER 2'x4' 4000K	4000K	76W	6,900	130W FL	2' x 4'	0-10V	>80	●	●
61964	LED 76W TROFFER 2'x4' 5000K	5000K	76W	6,900	130W FL	2' x 4'	0-10V	>80	●	●