


# WALLPACK TWP

40W, 60W, 90W

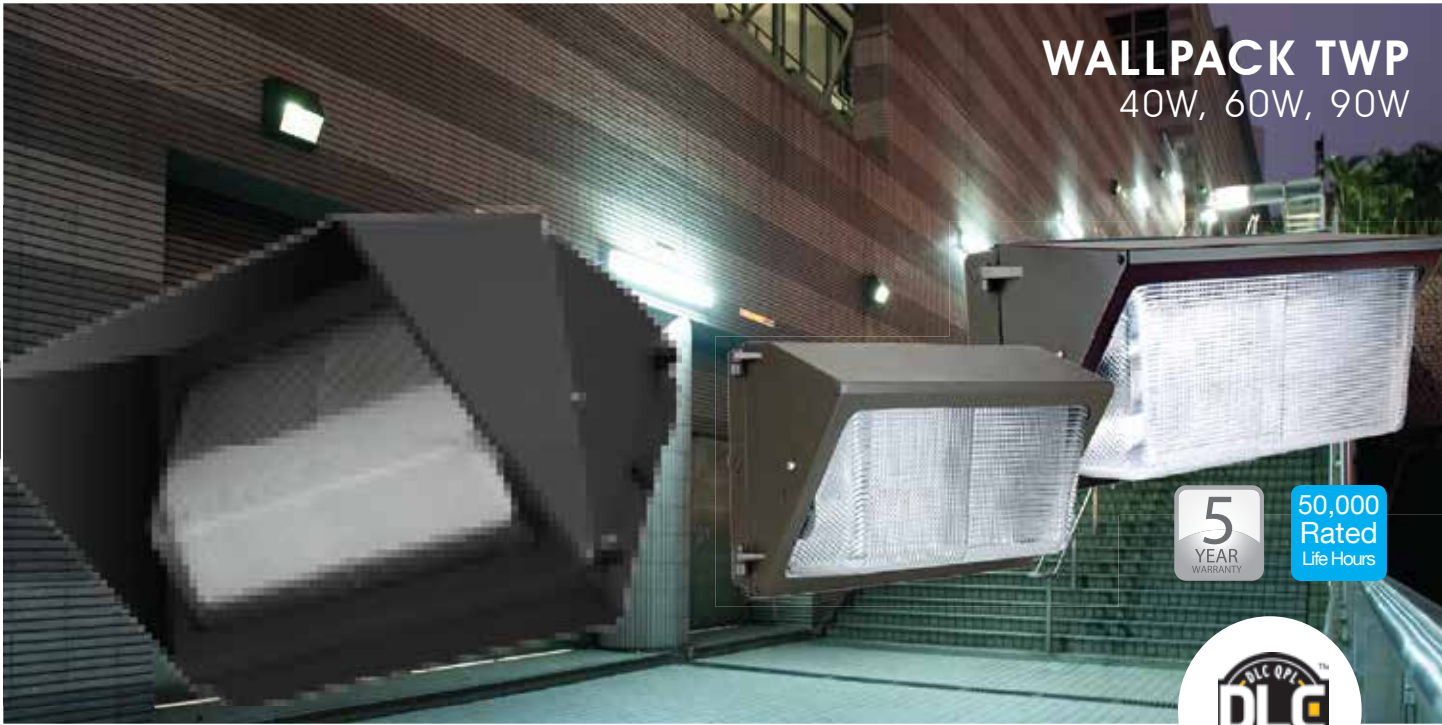

5  
YEAR  
WARRANTY

50,000  
Rated  
Life Hours



## Key Features

### Design Lights Consortium Certified

- Long Life LED chips
- Uniform and consistent color
- Excellent thermal design
- Motion Sensor
- 15-30 foot height performance
- Shatter-resistant glass
- Universal Voltage 120-277V
- Power Factor >0.99
- Operating Temp: -30°F~130°F
- 50,000 Hours rated average life

## Dimension

	Width	Depth	Height	Weight (lbs)
40W	14.5 / 363	7.5 / 188	9 / 230	9.5
60W	18.5 / 463	9.25 / 239	9 / 230	16.00
90W	18.5 / 463	9.25 / 239	9 / 230	18.60


\*Inch/mm

## Applications

- Area Lighting
- Security Lighting
- Pathway Lighting
- Perimeter Lighting
- Entryway Lighting

**SHIELD INCLUDED**

Requires shield for  
DLC qualification

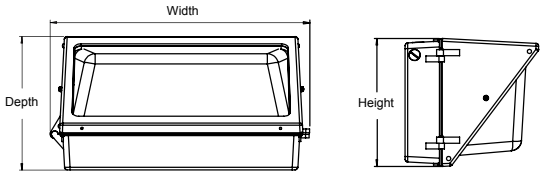

## Specifications

Item Code	Description	Color Temp	Wattage	Output Lumen	Eqiv. Wattage	CRI	Beam Type	DLC OPE LISTED
61914	LED 40W WALLPACK FT 4000K	4000K	40W	3,025	100W MH	80	Forward Throw	●
61915	LED 40W WALLPACK FT 5000K	5000K	40W	3,043	100W MH	80	Forward Throw	●
61916	LED 60W WALLPACK FT 4000K	4000K	60W	4,593	150W MH	80	Forward Throw	●
61917	LED 60W WALLPACK FT 5000K	5000K	60W	4,596	150W MH	80	Forward Throw	●
61918	LED 90W WALLPACK FT 4000K	4000K	90W	6,125	250W MH	80	Forward Throw	●
61919	LED 90W WALLPACK FT 5000K	5000K	90W	6,550	250W MH	80	Forward Throw	●